

Monotek®

Monotek® sheet is a versatile fibre cement cladding that creates cost effective durable wall systems. Perfect for use as a substrate for use with a variety of plaster systems.

Applications

- Monotek® sheet is a solution for textured monolithic light weight cladding construction.
- Suitable for use in residential villa's, townhouses, and industrial applications like worker accommodation.

Features & Benefits


- Sealed on the face and all edges for extra moisture resistance and ultimate durability.
- Monotek® is resistant to damage from moisture and rotting when installed and maintained correctly. Tested in accordance with AS/NZS2908.2.
- Non combustible and resists Flame spread. Fire ratings up to 60mins can be achieved with Monotek®.
- Monotek® cladding is dimensionally stable - it will not warp or shrink over time.
- Monotek® has good flexural strength, for easy transport and handling. High impact strength means less damage during construction and service life.
- Resists damage from insects.

Environmental Info

- The raw materials used to manufacture fibre cement are low in toxicity - wood pulp, cement, sand and water (recycled up to 4 times).
- Fibre cement is non-toxic to dispose of.
- H&S - Fibre cement is inert, non-toxic and not prone to off-gassing of volatile materials.

Manufacturing Classification

- Monotek® sheets are manufactured to AS/NZS 2908.2 'Cellulose- Cement Products Part 2: Flat Sheets' (ISO 8336 'Fibre Cement Flat Sheets').
- ISO9001 'Telarc' certified manufacturer.

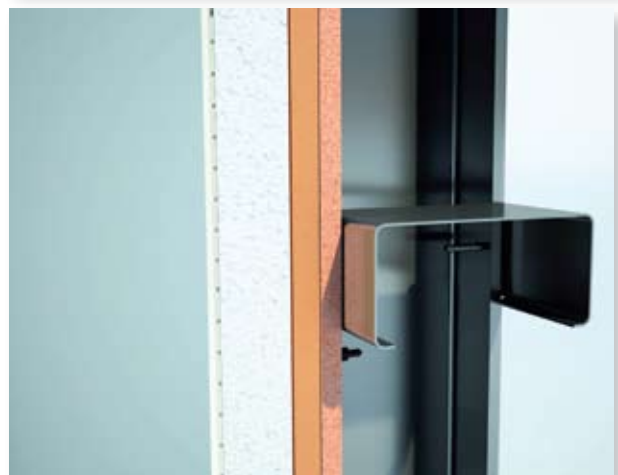

Monotek®

SPECIFICATIONS						
	Thickness (mm)	Length (mm)	Width (mm)	Area per Sheet (sqm)	Weight per Sheet (kg)	Units per pack
Monotek® Sheet - Edge Recessed 2 Sides	7.5mm	3000	1200	3.60	38.5	20
		2700	1200	3.24	34.7	20
		2450	1200	2.94	31.5	20
	9mm	3000	1200	3.60	46.2	20
		2700	1200	3.24	41.6	20
		2450	1200	2.94	37.7	20

EARLY FIRE HAZARD INDICES - TESTED TO AS 1530 PART 3	
Ignition Index	0
Flame Spread Index	0
Heat Evolved Index	0
Smoke Developed Index	0-1

FRAMECAD Cladding & Lining
is distributed by:
Bon Pacific Trading Limited
PO Box 1292
Auckland 1140, New Zealand

P +64 9 377 6640
F +64 9 307 7139
E info@bonpac.com
www.bonpac.com

Innovation Integration Sustainability
www.framecad.com